


145.00 C


**EFFER**  
145.00 C



**Standard**




**Optional**




22



**3S**

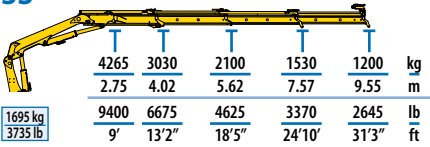



**4S**

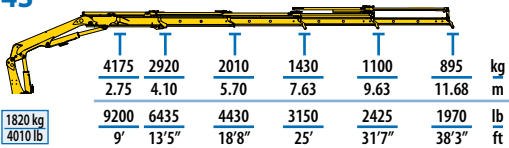

**3S+JIB 3S**

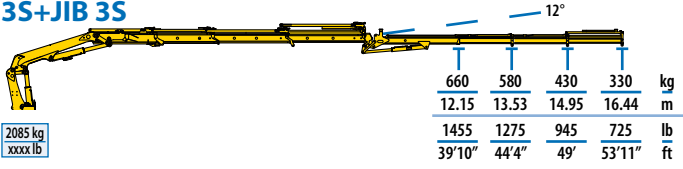

**4S+JIB 2S**

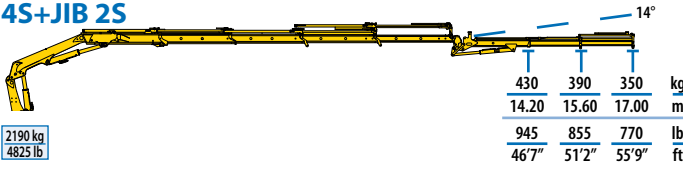

MODEL							
	txm	(°)	mm	mm	mm	mm	t
3S	12,18	400	2275	2495	780	4555 5955	13
4S	11,96	400	2275	2495	780	4555 5955	13
3S+JIB 3S	12,18	400	2275	2500	875	4555 5955	13
4S+JIB 2S	11,96	400	2275	2500	875	4555 5955	13

MODEL							
	lb*ft	(°)	in	in	in	in	lb
3S	88130	400	90	98	31	179 234	28700
4S	86540	400	90	98	31	179 234	28700
3S+JIB 3S	88130	400	90	98	34	179 234	28700
4S+JIB 2S	86540	400	90	98	34	179 234	28700