






Standard




Optional




4S

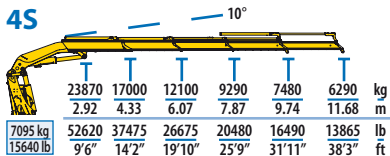


6S

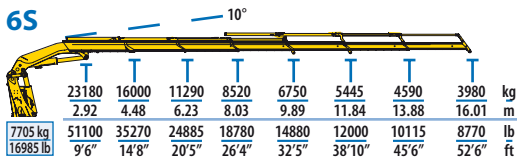


8S

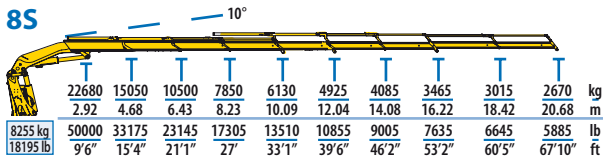

9S

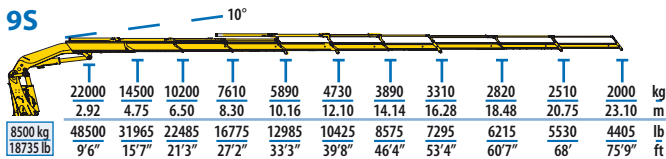



4S+JIB 4S

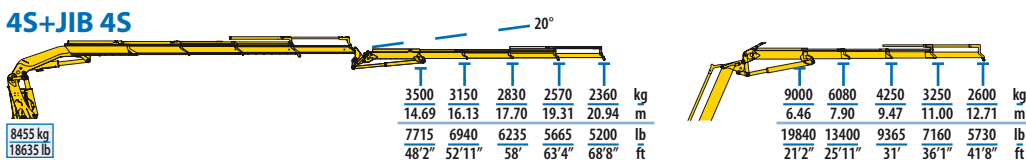



MODEL							
	txm	(°)	mm	mm	mm	mm	t
4S	73,61	580	2485	2500	1740	8710	26 - 32
6S	71,68	580	2485	2500	1775	8710	26 - 32
8S	70,43	580	2485	2500	1775	8710	26 - 32
9S	68,87	580	2485	2550	1775	8710	26 - 32
4S+JIB 4S	73,61	580	2670	2500	1990	8710	26 - 32

MODEL							
	lb*ft	(°)	in	in	in	in	lb
4S	532600	580	98	98	69	343	57300 70500
6S	518640	580	98	98	70	343	57300 70500
8S	509600	580	98	98	70	343	57300 70500
9S	498310	580	98	100	70	343	57300 70500
4S+JIB 4S	532600	580	105	98	78	343	57300 70500



6S+JIB 4S LIGHT

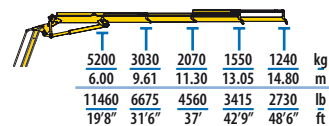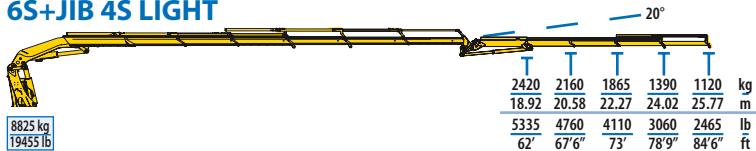



6S+JIB 4S HEAVY DUTY

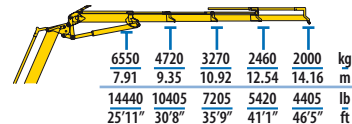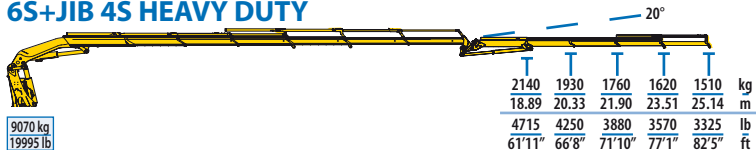



6S+JIB 6S LIGHT

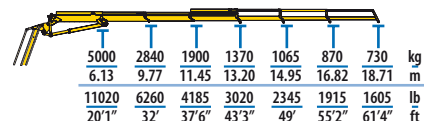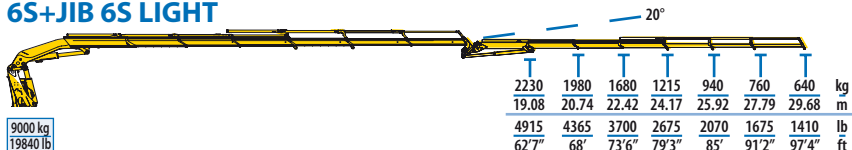



6S+JIB 6S HEAVY DUTY

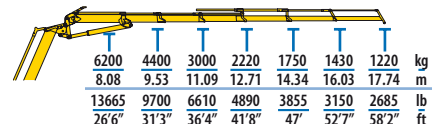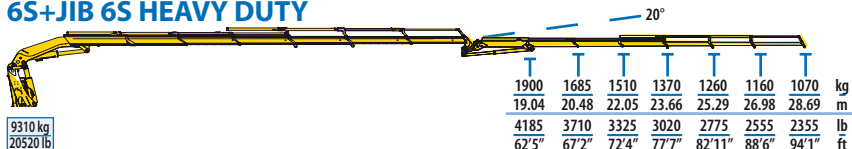

8S+JIB 4S

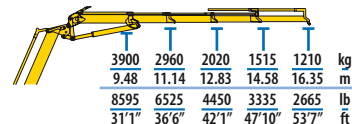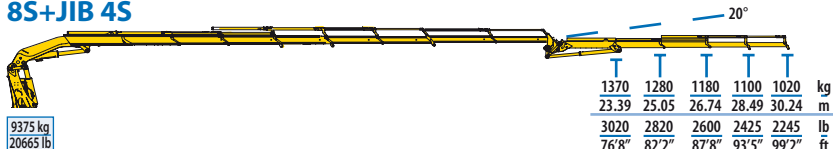

8S+JIB 6S

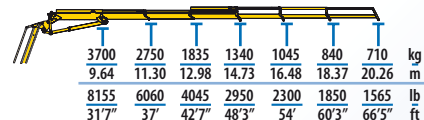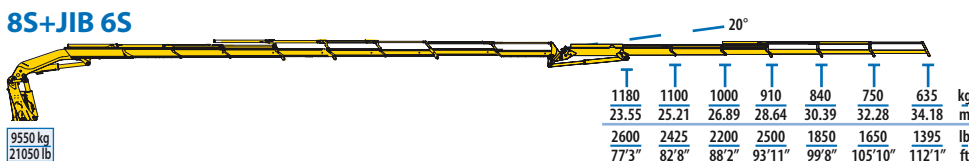

MODEL							
	txm	(°)	mm	mm	mm	mm	t
6S+JIB 4S LIGHT	71,68	580	2670	2500	1990	8710	26-32
6S+JIB 4S HD	71,68	580	2670	2500	1990	8710	26-32
6S+JIB 6S LIGHT	71,68	580	2670	2500	1990	8710	26-32
6S+JIB 6S HD	71,68	580	2670	2500	1990	8710	26-32
8S+JIB 4S	70,43	580	2670	2500	1990	8710	26-32
8S+JIB 6S	70,43	580	2670	2500	1990	8710	26-32

MODEL							
	lb*ft	(°)	in	in	in	in	lb
6S+JIB 4S LIGHT	518640	580	105	98	78	343	57300 70500
6S+JIB 4S HD	518640	580	105	98	78	343	57300 70500
6S+JIB 6S LIGHT	518640	580	105	98	78	343	57300 70500
6S+JIB 6S HD	518640	580	105	98	78	343	57300 70500
8S+JIB 4S	509600	580	105	98	78	343	57300 70500
8S+JIB 6S	509600	580	105	98	78	343	57300 70500