
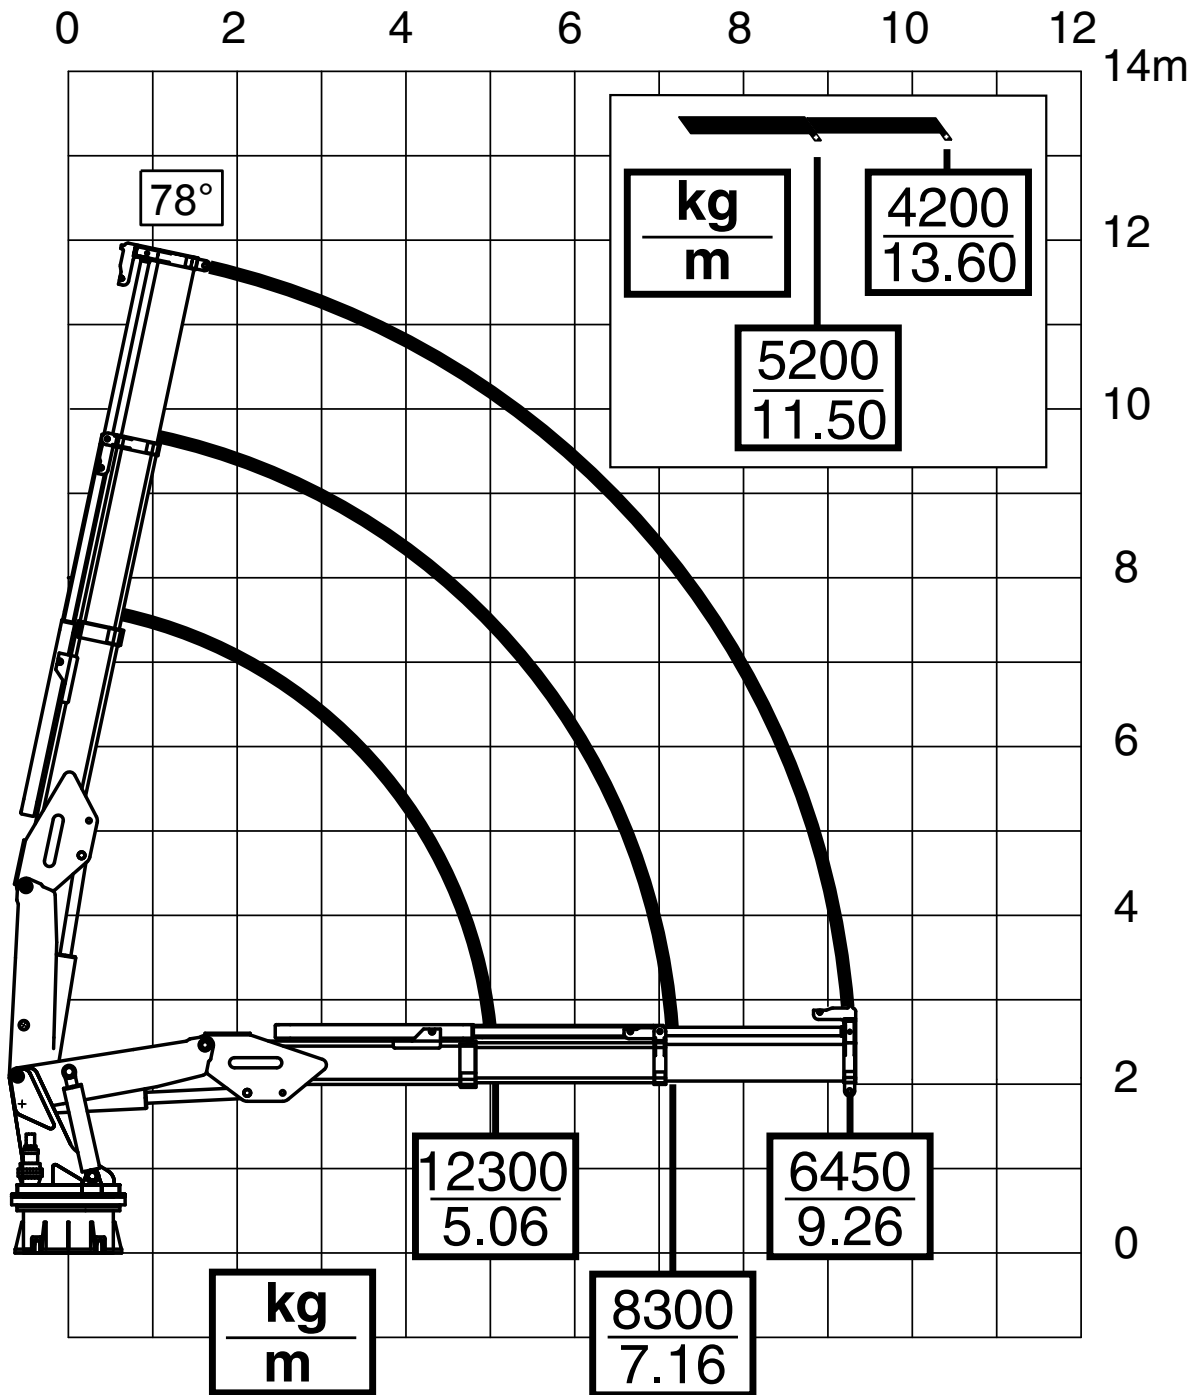
 Max. load which can be lifted in the position indicated.


 Lifting curve obtained when the Load moment limit device, supplied as optional, is installed and starting with the outer boom in horizontal position.


The SWL is obtained lifting with the hook and with the main boom up to 9°.

The installation of a winch, supplied as optional, as well as the operating conditions may vary the stated values.

Please refer to the specific data sheets for more information.




 Max. load which can be lifted in the position indicated.

 Lifting curve obtained when the Load moment limit device, supplied as optional, is installed and starting with the outer boom in horizontal position.

The SWL is obtained lifting with the hook and with the main boom up to 9°.

The installation of a winch, supplied as optional, as well as the operating conditions may vary the stated values.

Please refer to the specific data sheets for more information.

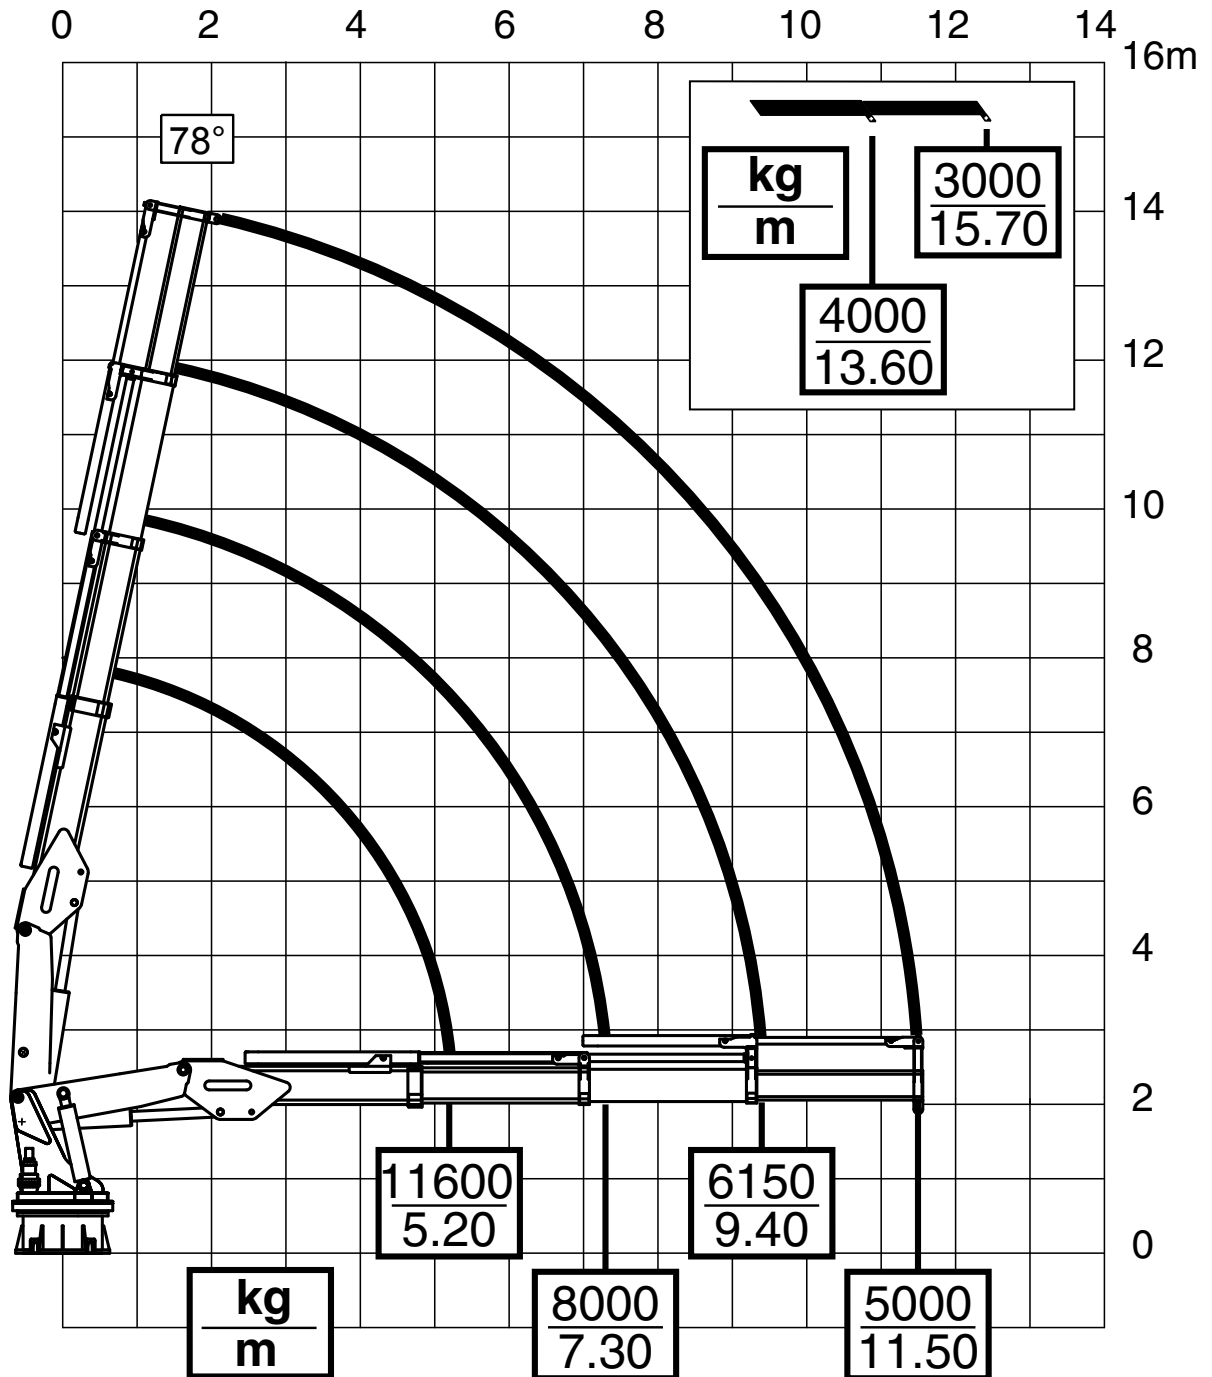


— Max. load which can be lifted in the position indicated.


| Lifting curve obtained when the Load moment limit device, supplied as optional, is installed and starting with the outer boom in horizontal position.


The SWL is obtained lifting with the hook and with the main boom up to 9°.

The installation of a winch, supplied as optional, as well as the operating conditions may vary the stated values.

Please refer to the specific data sheets for more information.

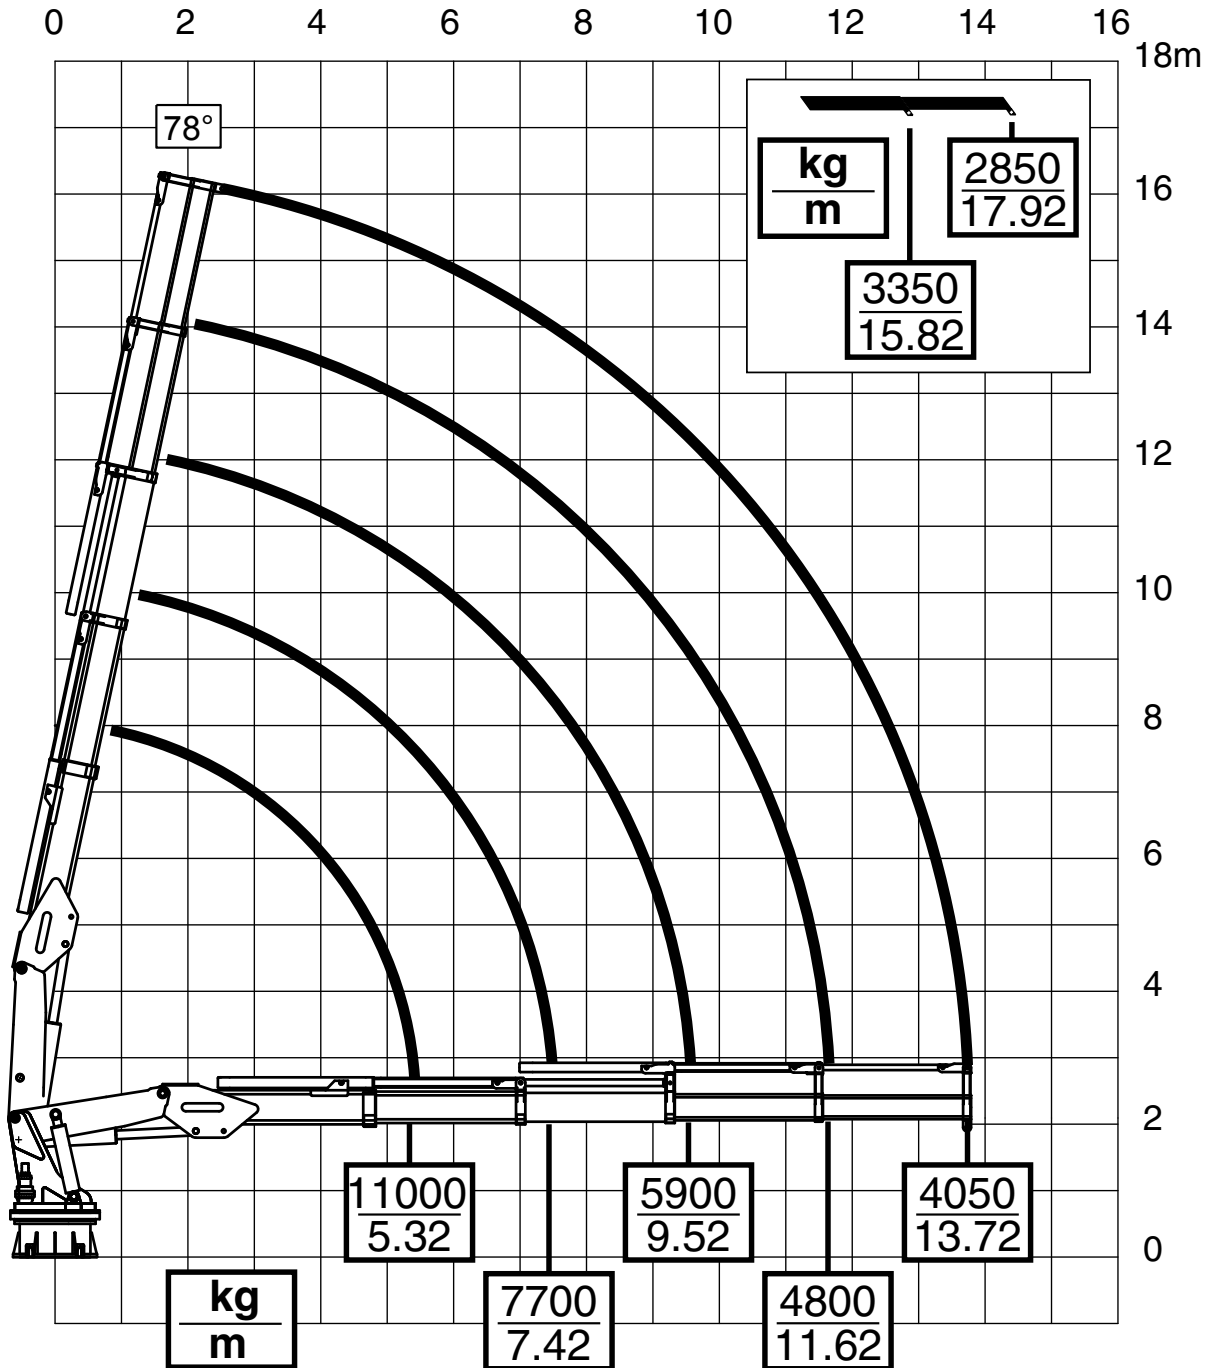


 Max. load which can be lifted in the position indicated.



 Lifting curve obtained when the Load moment limit device, supplied as optional, is installed and starting with the outer boom in horizontal position.

The SWL is obtained lifting with the hook and with the main boom up to 9°.

The installation of a winch, supplied as optional, as well as the operating conditions may vary the stated values.

Please refer to the specific data sheets for more information.

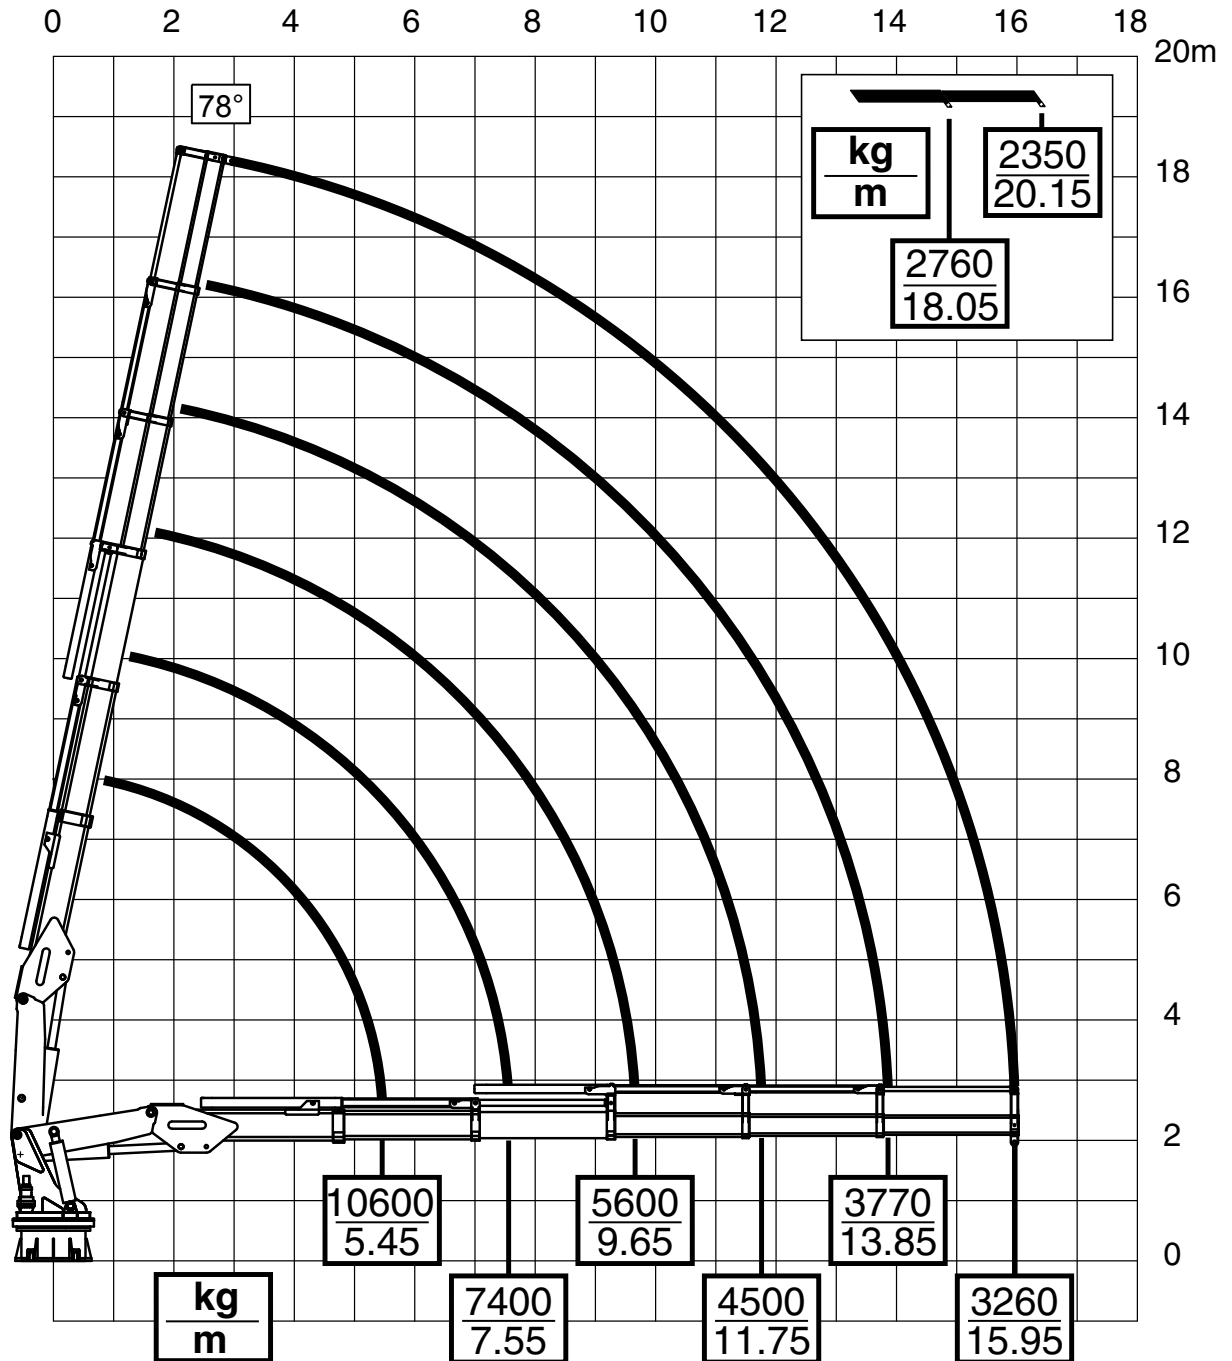

 Max. load which can be lifted in the position indicated.
 Lifting curve obtained when the Load moment limit device, supplied as optional, is installed and starting with the outer boom in horizontal position.

The SWL is obtained lifting with the hook and with the main boom up to 9°.

The installation of a winch, supplied as optional, as well as the operating conditions may vary the stated values.

Please refer to the specific data sheets for more information.